

100W LED Flood Technical



SFLEDFL100SMD2LM

Light Source:	LED
Wattage:	100W
Input voltage:	100-277VAC
LED Brand:	Lumileds luxeon
Driver Brand:	Meanwell
Degree of protection:	IP65
IK:	IK08
CRI:	70/80/90
Kelvin:	2700K-6500K
Power factor:	≥ 0.95
Optic:	PC lens with smart beam
Light source lumen output:	13000lm
Luminaire lumen output:	12000lm(Ra70 CCT5000K)
L:	L70
B:	B10
Compliance:	EN60598, EN62493, EN61547, EN55015, EN62321
Lifetime:	>54000H
Dimension:	402x295x60mm
Warranty:	5 years



PHOTOMETRIC

TECHNICAL

Description



LED floodlight for indoor and outdoor lighting, comprising:

- Die-casting aluminum body, chemically pre-treated and painted powder coating
- Very high performance PC lens
- Full range of beam package: Narrow, Medium, Asymmetric
- 304 Stainless steel external screws

Powered coated iron bracket (Stainless steel bracket available)

Dimmable ballast on request

-3000K~6000K available upon request

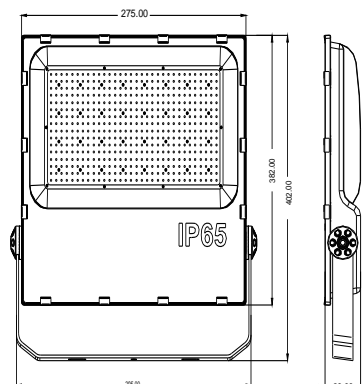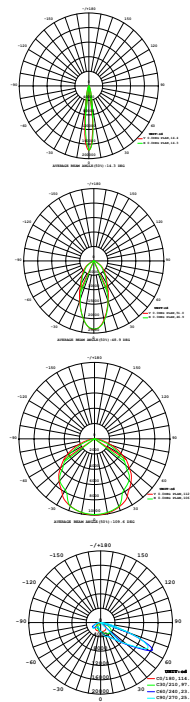

Weight 5.3Kg